

# Shielded Stacked 2x6 RJ45

8P/8C Shielded Stacked and Ganged 2x6 RJ45 Ethernet Connectors



## Product Features:

- Shielded RJ45 2x6 Connectors
- Minimum of 750 Mating Cycles
- Multiple Gold Contact Plating Options
- DWV - 1500VAC Contact to Shield
- Current Rating - 1.5A
- Voltage Rating - 125V
- UL94V-0 Flammability Rating


Part Number	Contact Gold Plating (min)	Operating Temp Range	LED Color (L/R)
HCJ26-802SK-L11	6 $\mu$ "	-40°C to +85°C	Green/Green
HCJ26-804SK-L11	30 $\mu$ "	-40°C to +85°C	Green/Green
HCJ26-805SK-L11	50 $\mu$ "	-40°C to +85°C	Green/Green
HCJ26-802SK-L12	6 $\mu$ "	-40°C to +85°C	Green/Yellow
HCJ26-804SK-L12	30 $\mu$ "	-40°C to +85°C	Green/Yellow
HCJ26-805SK-L12	50 $\mu$ "	-40°C to +85°C	Green/Yellow
HCJ26-802SK-L21	6 $\mu$ "	-40°C to +85°C	Yellow/Green
HCJ26-804SK-L21	30 $\mu$ "	-40°C to +85°C	Yellow/Green
HCJ26-805SK-L21	50 $\mu$ "	-40°C to +85°C	Yellow/Green

### Notes:


1. Alternate footprints, shielding, and LED colors available. Please contact the factory for additional information.
2. Part specific datasheets available upon request.

# HALO 8P/8C Shielded Stacked and Ganged 2x6 RJ45

## Mechanical (w/ LEDs)

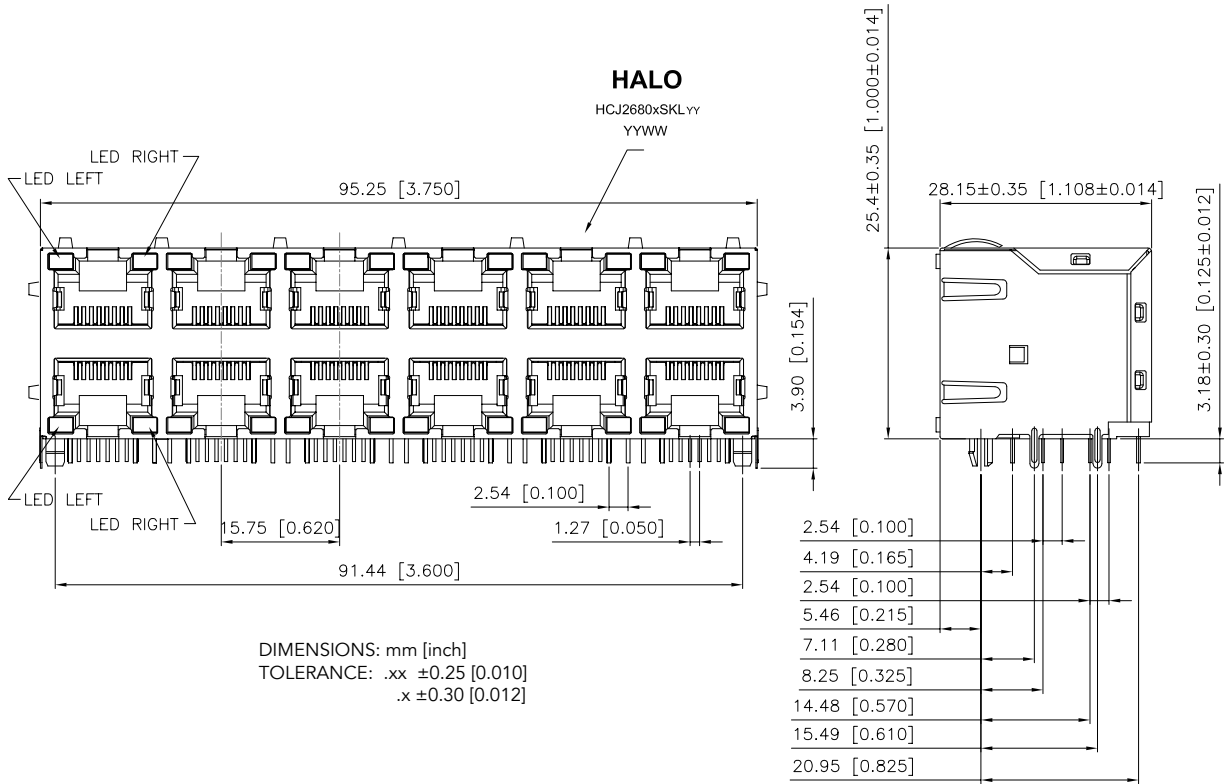

## PCB Layout (w/ LEDs)

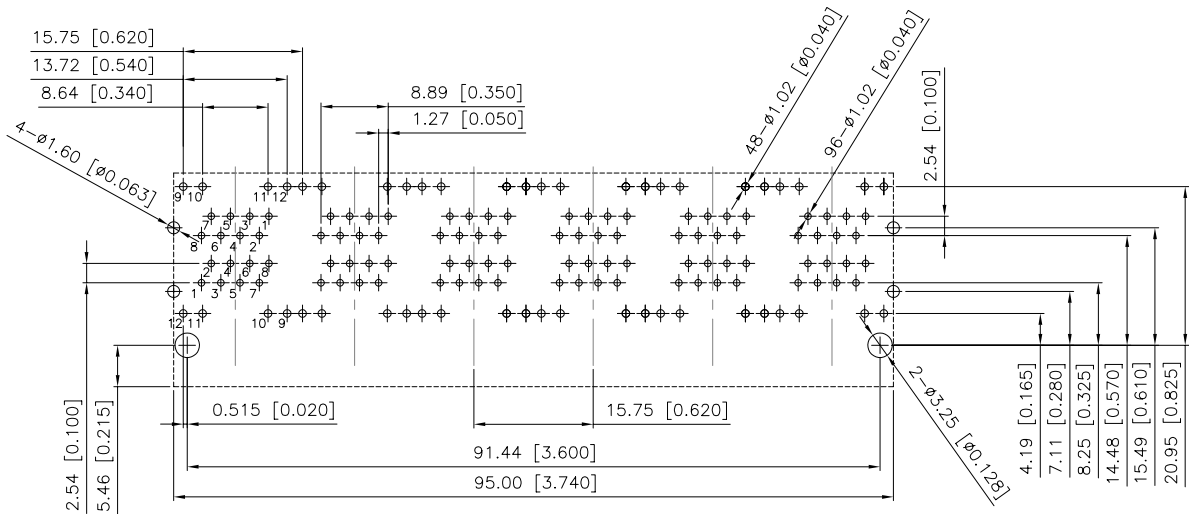

Recommended PCB Layout (Top View)  
Dimensional Tolerance: ±0.08 [0.003]

