

# Shielded Vertical 1x1 RJ45

8P/8C Vertical Shielded RJ45 Ethernet Connectors



## Product Features:


- Shielded RJ45 Connectors
- Minimum of 750 Mating Cycles
- Multiple Gold Contact Plating Options
- DWV - 1500VAC Contact to Shield
- Current Rating - 1.5A
- Voltage Rating - 125V
- UL94V-0 Flammability Rating

Part Number	LED's L/R	Contact Plating (min)	Latch Orientation	Operating Temp Range
HCJV1-802SK	None	6 $\mu$ "	Vertical - Top Entry	-40°C to +85°C
HCJV1-804SK	None	30 $\mu$ "	Vertical - Top Entry	-40°C to +85°C
HCJV1-805SK	None	50 $\mu$ "	Vertical - Top Entry	-40°C to +85°C

### Notes:

1. Unshielded, alternate footprints, and panel stop tab variations available. Please contact the factory for additional information.
2. Part specific datasheets available upon request.

## Mechanical

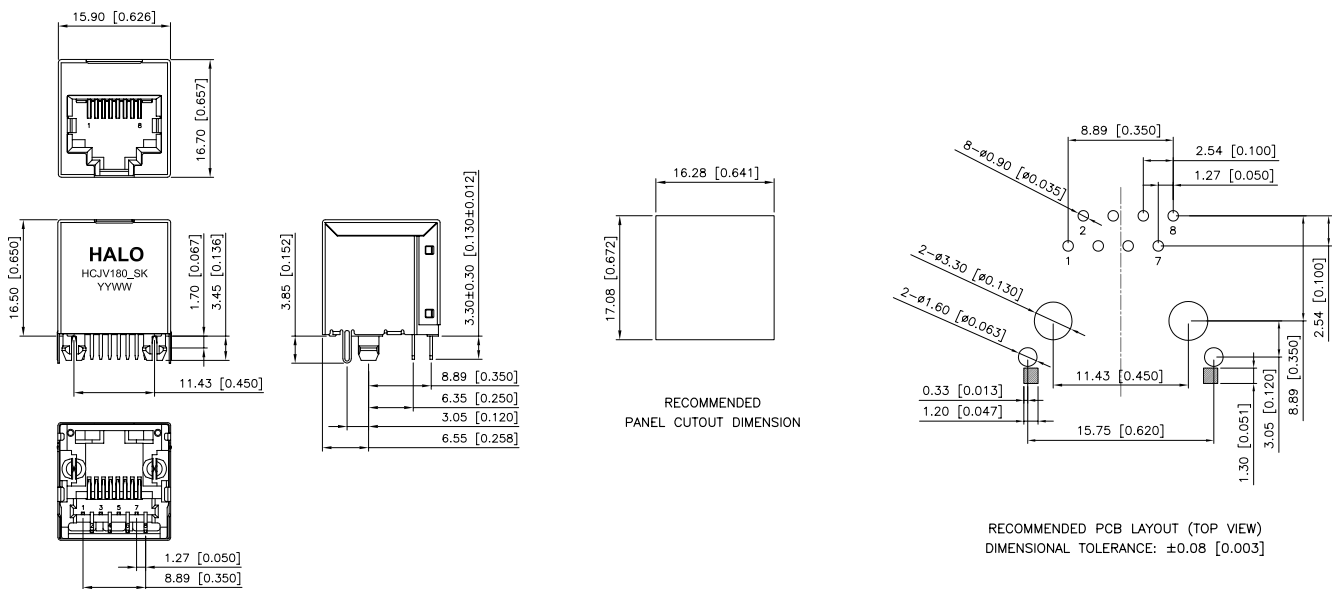

DIMENSIONS: mm [inch]  
 TOLERANCE: .XX ±0.25 [0.010]  
 .X ±0.30 [0.012]



2880 Lakeside Drive #116  
 Santa Clara, CA 95054  
 (650) 903-3800  
[www.haloelectronics.com](http://www.haloelectronics.com)

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.

© Copyright 2018 HALO Electronics, Inc. All rights reserved.

Revised 3/2019. Download the latest version at <https://www.haloelectronics.com/pdf/connector-8p8c-shielded-vertical1x1.pdf>